


## FSC-RT26 Underground Tag

FSC-RT26 is dedicated to the goods positioning. It has a good performance of far reading distance, compressive and impact resistance, high mechanical strength and easy to install, especially suitable for a variety of tobacco tray positioning, grain management, conveniently used in all the RFID positioning management applications.

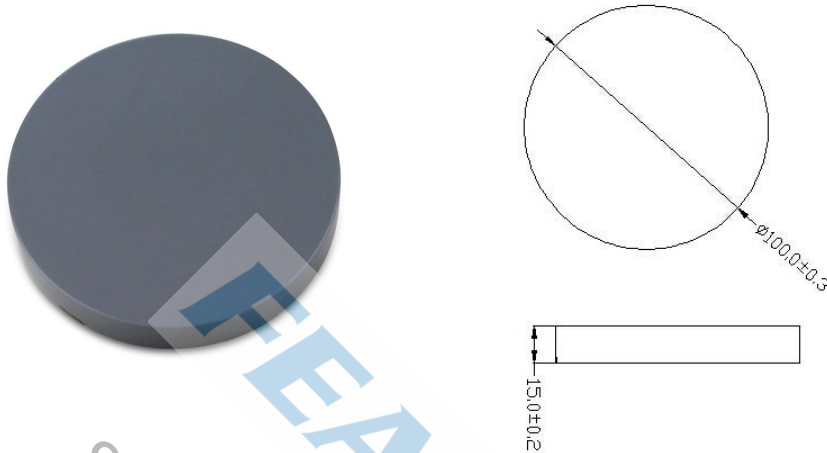

Performance Features	
Frequency range:	920 - 925 MHz
Sensitivity:	Front-17dBm
Chip:	ALIEN H3
Chip protocol:	EPC Class-1 Gen2
Protocol supported:	ISO 18000-6C, EPC global C1Gen2
Function:	Read / Write
Chip Features	
E P C :	96 Bits
Chip memory :	512 User Bits
T I D:	64 bits
Access password:	32 bits
Kill password:	32 bits
Anti-interference:	Strong
Data retention:	10 years
Write endurance:	10,000 cycle
Mechanical Features	
Size:	100mm*15mm (with adhesive)
Material of shell:	Ceramic
Color:	Black (or customized)
Weight:	278g
Installation method:	buried in the ground and keep parallel to the floor
Protection class:	IP65
Operating Temperature :	-40°C to +250°C
Applications	
Tobacco management, food and other goods positioning management and etc.	