

2.4G BLUETOOTH, WIFI

ZIGBEE CHIP ANTENNA

  2450±50MHz

Dimensions : 3.35 x 1.75 x 1.2 mm

Clearance Area: 5.2 x 5.0 mm

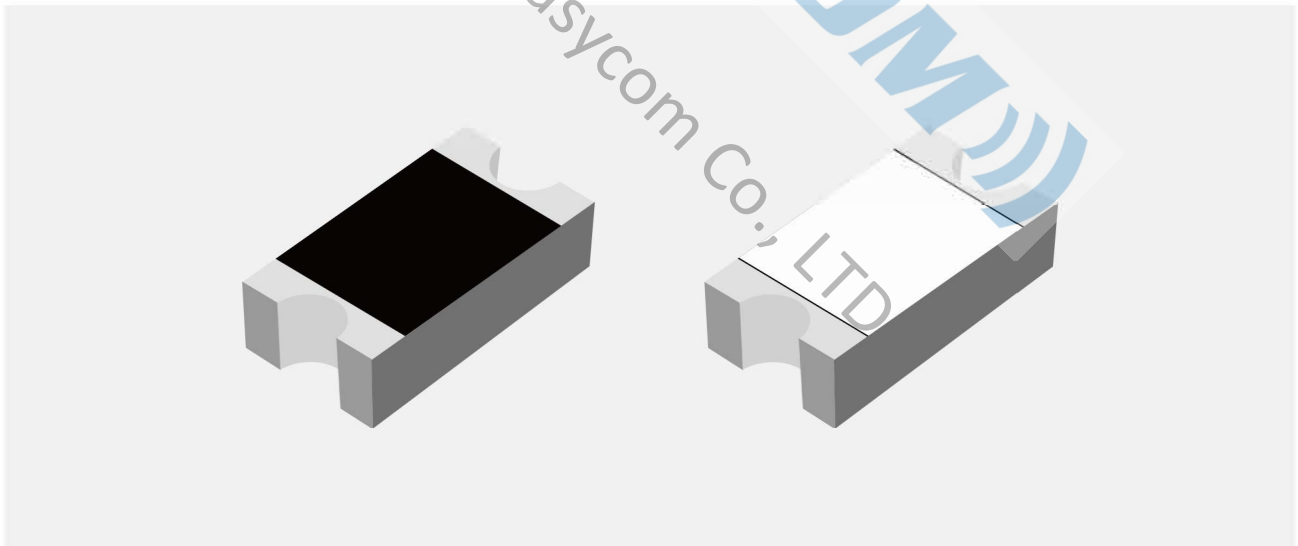


Table of Contents


1 FEATURES & BENEFITS	1
2 APPLICATIONS.....	1
3 ORDER INFORMATION.....	1
4 REFERENCE GUIDE.....	2
5 EVALUATION BOARD WITH THE ANTENNA.....	2
6 MATCHING NETWORK.....	3
7 RECOMMENDED LAYOUT.....	3
8 ELECTRICAL PERFORMANCE.....	4
8.1 VSWR	4
9 SOLDERING CONDITIONS.....	5
10 PACKAGING.....	5
10.1 Optimal Storage Conditions for Packaged Reels	5
10.2 Packagings and Dimensions (Unit:mm).....	6
11 ANTENNA CERTIFICATION	7

1 FEATURES & BENEFITS

- Low Profile
- Light Weight
- Easy to Integrate
- Intended for SMD Mounting
- Reduced Cost and Time-to-Market

2 APPLICATIONS

- 3G (UMTS) and 4G (LTE) Mobile Communication Networks
- Wireless Routers and Modems
- Internet of Things (IoT) Devices, M2M
- Remote Technology / Monitoring
- Consumer Tracking
- Smart Metering

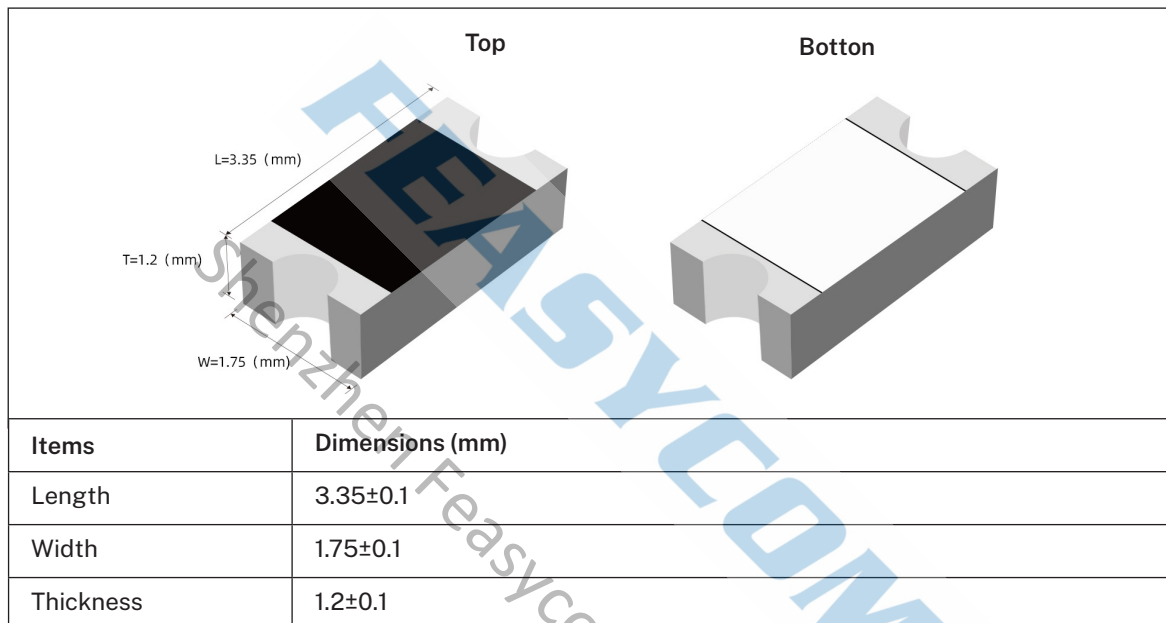

3 ORDER INFORMATION

Product Name	2.4G Bluetooth, WIFI, ZigBee Chip Antenna
Part Number	F12E00041A0 (M01-X00010ROA)
Dimensions	3.35 x 1.75 x 1.2 mm
Mounting	SMT
Packaging	Tape & Reel
MOQ	2500 pcs/reel


4 REFERENCE GUIDE

Technical Features	2450±50 MHz
Band Width	>100MHz
Input Impedance	50Ω
Peak Gain	4.3 dBi
VSWR	<2
Operating Temperature	-40°C to +85°C
Power Capacity	3W
Dimensions (L x W x H)	3.35 x 1.75 x 1.2 mm
All data were measured in free space and on a reference ground plane of 65 mm length, 40 mm width, and 1.0 mm thickness. Application data might vary.	

5 EVALUATION BOARD WITH THE ANTENNA


The evaluation board provides operation at 2450±50 MHz.

Evaluation Board dimension: 65 x 40 x 1.0 mm

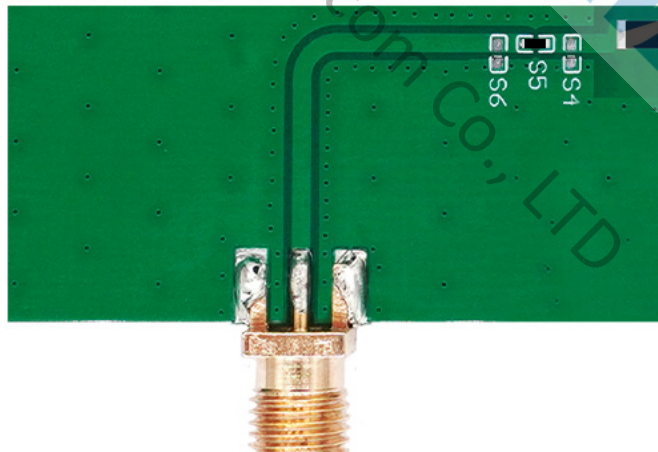


It's strongly recommended to place the antenna near the edge of the board. Maximum antenna performance is achieved by placing the antenna towards one of the corners of the PCB and with the feed point of the antenna as close to same corner of the PCB as possible.

6 MATCHING NETWORK

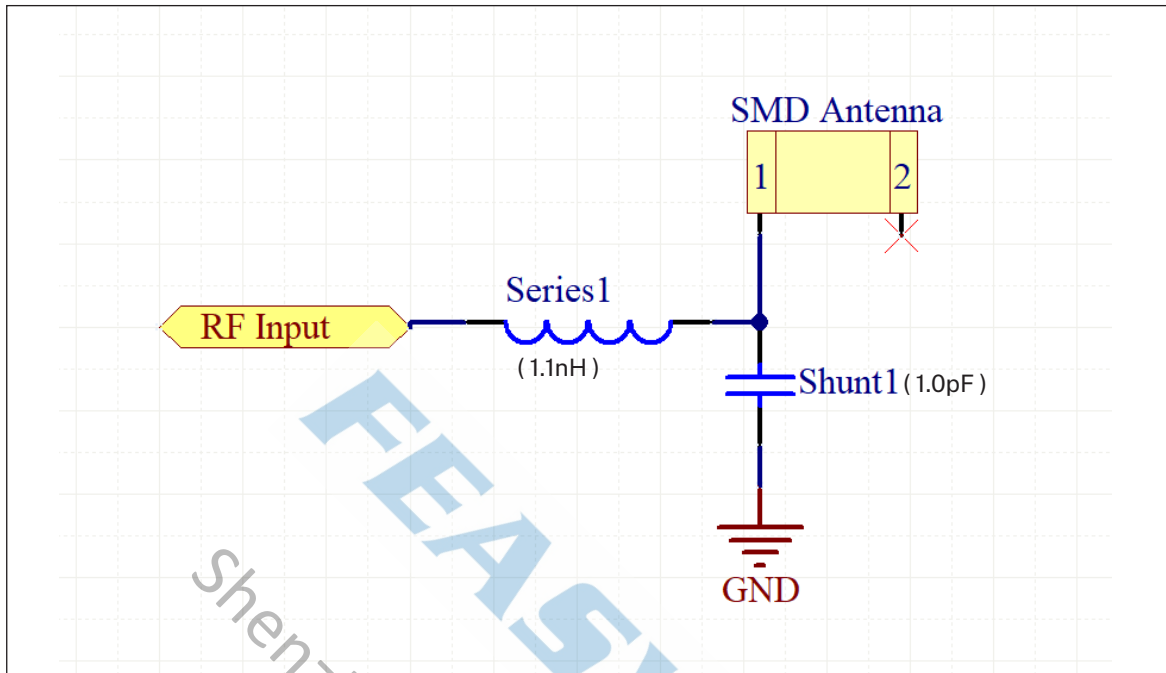

7 RECOMMENDED LAYOUT

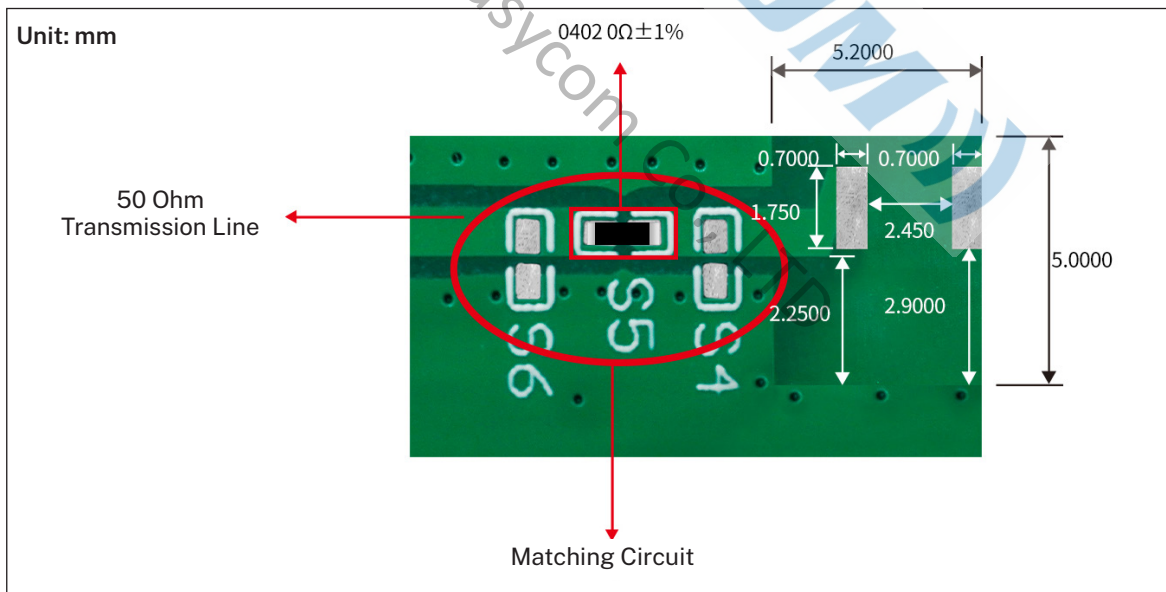


8 ELECTRICAL PERFORMANCE

© Note

The data displayed in Chapter 8 were measured in free space and on a reference ground plane of 65 mm length, 40 mm width, and 1.0 mm thickness.

8.1 VSWR

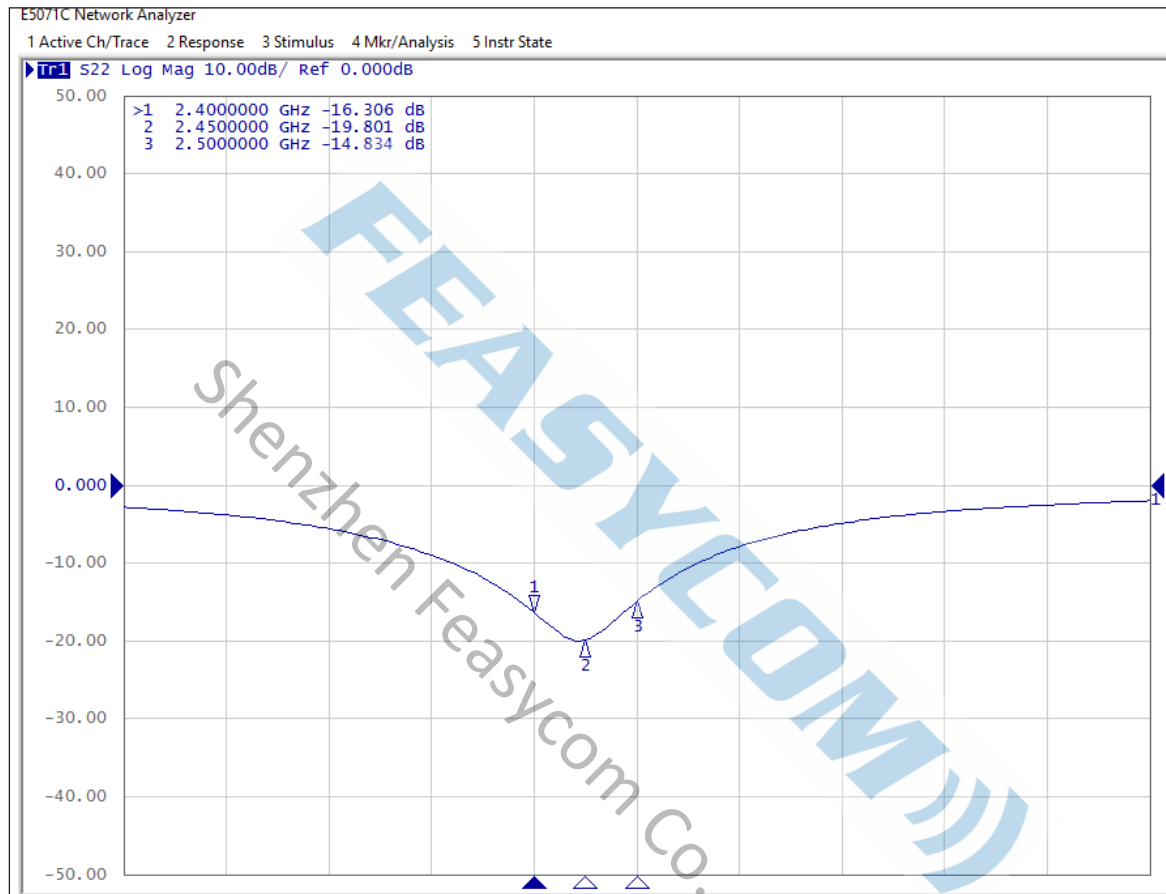


	Efficiency	Peak Gain	Directivity
2400MHz	55.21%	1.45 dBi	5.32 dBi
2450MHz	66.45%	2.71 dBi	5.21 dBi
2500MHz	57.53%	1.98 dBi	5.29 dBi

9 SOLDERING CONDITIONS

This antenna is suitable for lead free soldering.

The reflow duration should be adjusted to create good solder joints without raising the antenna temperature beyond the allowed maximum of 260°C.

The figure below shows the temperature profile for soldering.

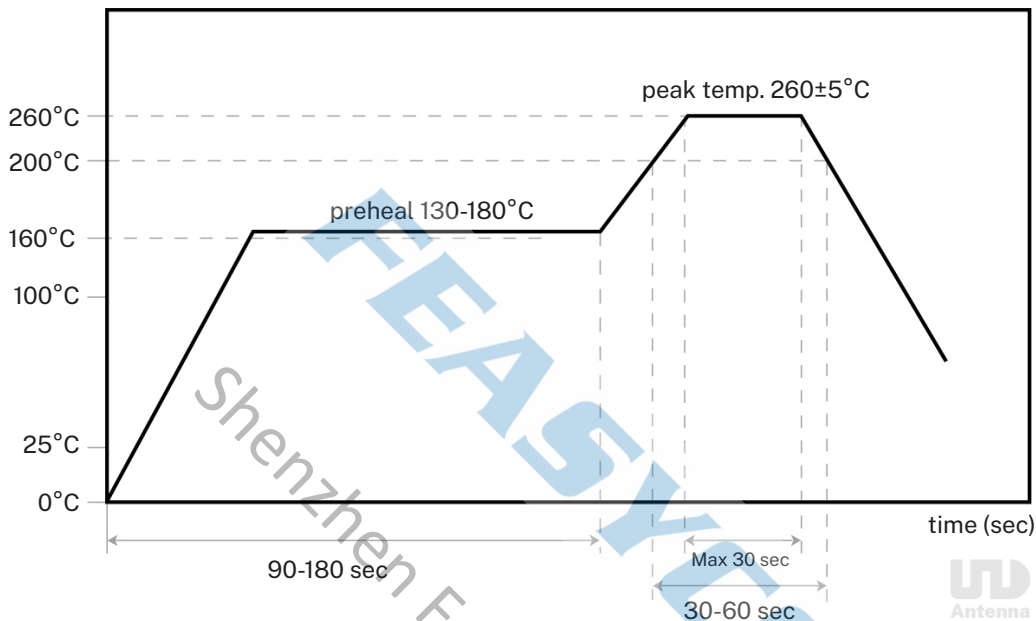

10 PACKAGING


10.1 Optimal Storage Conditions for Packaged Reels

Temperature	-5°C to 40°C
Humidity	Less than 70% RH
Shelf life	18 months
Storage place	Away from corrosive gas and direct sunlight
Packaging	Reels should be stored in unopened sealed manufacturer's plastic packaging.

© **Note**

Storage of open reels of antennas is not recommended due to possible oxidization of pads on antennas. If short-term storage is necessary, then it is highly recommended that the bag containing the antenna reel is re-sealed and stored in like storage conditions as in the above table.

10.2 Packagings and Dimensions (Unit: mm)

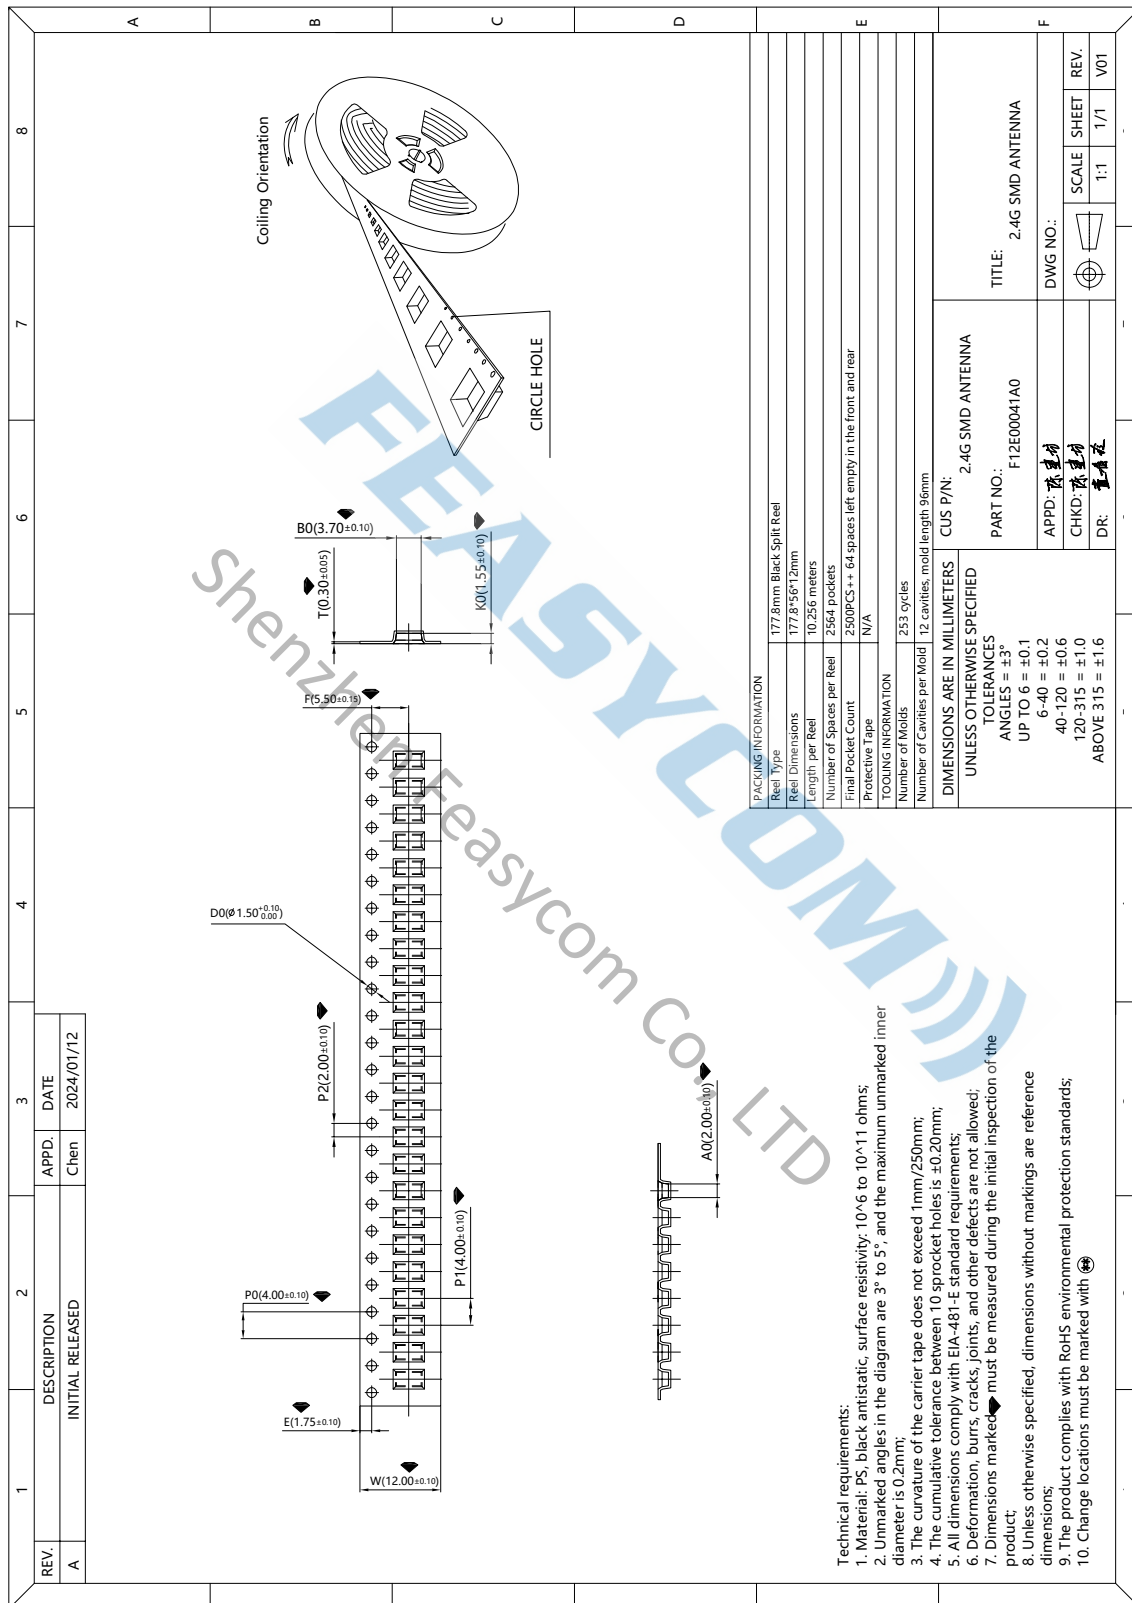

11 ANTENNA CERTIFICATION

RoHS Approval	Compliant [2011/65/EU&2015/863]
REACH Approval	Conform or declared [(EC)1907/2006]
Hazardous material regulation conformance: A certificate of conformance is available upon request. Feel free to consult us for details.	

FEASYCOM
Shenzhen Feasycom Co., LTD